



- NOTES:**
1. Intentionally left blank
 2. Steel reinforcement: A.S.T.M. A199-A615 Grade 60-60 ksi
 3. Intentionally left blank
 4. Concrete: 4000 psi @ 28 days, 5% - 9% air entrainment
 5. Intentionally left blank
 6. Intentionally left blank
 7. Design loading A-0.3/ 300 psf - walkways, flotation forces not accounted for
 8. Max. cover over tank: 3' of earth fill
 9. Min. 1" concrete cover over reinforcement
 10. Tank to conform with ASTM C1227

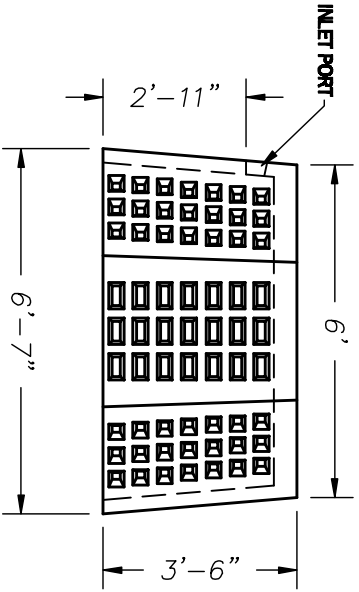

SIDE VIEW

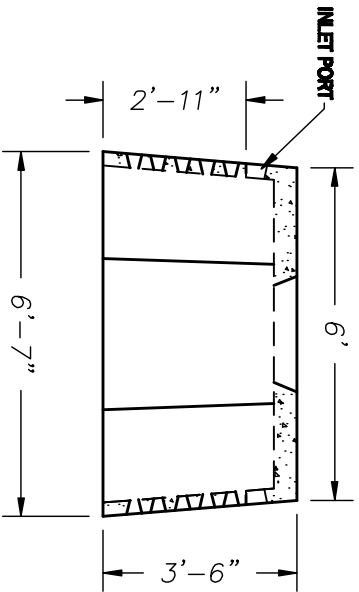

SECTION A-A

PRODUCT SPECIFICATION
630 GALLON DRY WELL



DRAWING NUMBER:
630-DW
DATE: 2/14/2012