


PLAN VIEW

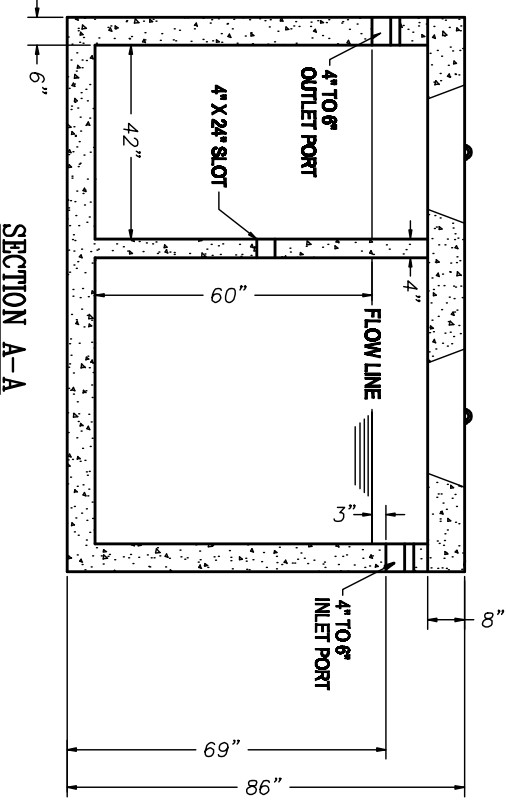

SECTION A-A

- NOTES:**
1. Intentionally left blank
 2. Steel reinforcement: A.S.T.M. A496-A615 Grade 60-60 ksi
 3. Joints sealed with Consel CS101 Butyl Mastic
 4. Concrete: 4000 psi @ 28 days, 5% - 9% air entrainment with 5 lbs / cu. yd of fiber mesh
 5. Equipped with polylok seals
 6. Intentionally left blank
 7. Design loading A-0.3/ 300 psf - walkways, flotation forces not accounted for
 8. Max. cover over tank: 3' of earth fill
 9. Min. 1" concrete cover over reinforcement
 10. Tank to conform with ASTM C1227

MHCP
 MID-HURON CONCRETE PRODUCTS
 ROUTE 9, GOLD SPRING, NY 10918
 (945) 265-3286

PRODUCT SPECIFICATION
 1250 GALLON H-20 TANK

DRAWING NUMBER: 1250-H20-T
 2/23/13